




LightWeight Mine Ventilation Duct (LWMVD)

BENEFITS & FEATURES

- FRAS COMPLIANT
- FIT-FOR-PURPOSE SOLUTION
- ULTRA LIGHTWEIGHT
- HIGH PERFORMANCE
- CARBON FIBRE
- REDUCE MANUAL HANDLING RISK

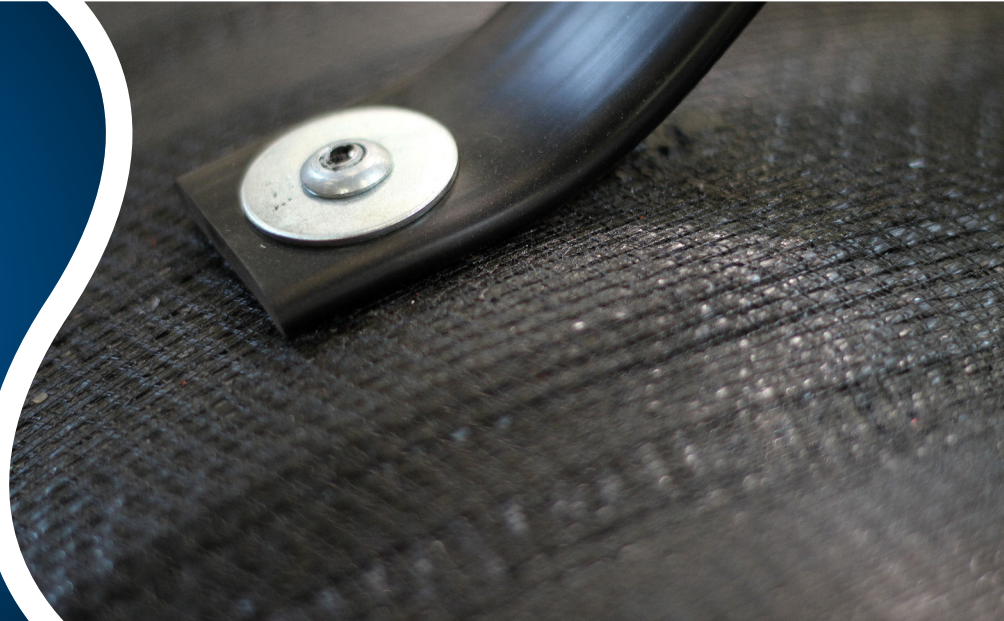

A NEW GENERATION OF VENTILATION DUCT AND FITTINGS; LWMVD - WITH MORE THAN 40 YEARS MVD EXPERIENCE, RPC HAS THE CAPABILITY TO MEET YOUR VENTILATION REQUIREMENTS.



RPC Technologies is the manufacturer and supplier of a fully Fire Retardant Anti-Static (FRAS) compliant, exceptionally lightweight MVD range engineered from carbon fibre and fire-retardant vinyl ester resin.

The LWMVD range delivers a quality engineered, high performance and ultra-lightweight duct providing an economical and reliable fit-for-purpose ventilation solution.

RPC's LWMVD are routinely vacuum performance tested (1.6 times the rated pressure) and conductivity testing requirements are added to ensure consistent quality and compliance are maintained.

Compliant to the FRAS requirements of TRG 3608: Non-metallic materials for use in underground coal mines and reclaim tunnels in coal mines.

In addition, RPC's LWMVD reduces manual handling risk when installing or relocating due to its lightweight and ease of handling.

LightWeight Mine Ventilation Duct (LWMVD)

RPC offers a number of fitting configurations and ducting length (duct standard lengths are 2, 2.4 and 3 metres):

- Round Straight duct (Ø618, Ø718, Ø750, Ø900)
- Oval straight duct (870x355 and 1075x400)
- Elbow (Round or Oval, 15°, 30°, 45°, 60°, 70° and 90°)
- Tee and branches (Round to round or oval to round, 30°, 45°, 60°, 70° and 90°)
- Reducers/Adaptors (round-to-round or oval-to-round, concentric or eccentric)
- End cap (round or oval)
- Relief valve
- Air damper

RPC can also provide solutions tailored to your specific ventilation requirements/applications. Please email enquiries@rpctechnologies.com for further information.

Table of weights for LWMVD

LWMVD	Diameter (mm)	Vacuum Rating kPa	2.0 metres	2.4 metres	3.0 metres
			Weight (kg)		
	618	-12	13	15	18
	718	-12	15	18	21
	750	-12	*Weights available on request		
	900	*			

Note: The above table of weights are correct at the time of publishing this Product Data Sheet and may be subject to change

*Vacuum ratings available on request



Engineer at RPC Broadmeadow demonstrating the lightweight nature of LWMVD.



RPC Technologies Pty Ltd
 A: 56 Clyde Street, Broadmeadow
 NSW 2292 Australia
 P: +61 2 4911 5500
 F: +61 2 4911 5581
 E: enquiries@rpctechnologies.com
www.rpctechnologies.com